

# **DDL-8000A Series**

Direct-drive, High-speed, 1-needle, Lockstitch Machine with Automatic Thread Trimmer





# JUKI has line up a new standard model "Simple Series" to the 1-needle, lockstitch machine with Thread Trimmer.

### The slim-sized commines appropriation menand Parts

Both the slim-sized control box and the operation panel are integrated with the machine head. The machine is provided as standard with the operation panel.



|  | No. | Function table of operation panel |
|--|-----|-----------------------------------|
|  | 1   | Stitching information             |
|  | 2   | Production information            |
|  | 3   | Reverse stitching patern          |
|  | 4   | Sewing speed                      |
|  |     |                                   |

5 Bobbin thread counter6 Error screen, etc

#### Various voice guide

When the amount of oil changes to empty or full, the machine inform at voice guide.

The other voice guidance includes sewing machine operating rate, productivity achievement rate etc.

#### **USB Port (Two places)**

The operation panel and control box are also provided as standard with a USB port.

### **Standard equipment**

The reverse feed lever, LED light, etc.

# **DDL-8000A Series**

## M Semi-dry head type

## DDL-8000A-MS Max. sewing speed: 5,000sti/min

# Sewing work free from oil stains by means of our leading-edge dry-head technology.

With the advanced dry technology of enabling operation without being lubricated, a frame which does not need lubrication has been developed.

It is provided with not only a high-speed sewing capability, but also a safety feature for preventing oil stains.



The needle bar and thread take-up components are not lubricated.For the hook section, the standard method of lubrication is employed.

# S Minute-quantity lubrication type

DDL-8000A-SH Max. sewing speed: 4,500sti/min

# The machine contributes to production improvement.

The DDL-8000A-S is the standard model developed with the emphasis on durability.

It produces seams with consistency when run at speeds which falls in the range of the highest sewing speeds.




• The needle bar and thread take-up components are lubricated with the minimum required quantity of oil. For the hook section, the standard method of lubrication is employed.

#### SPECIFICATIONS

| Model name   | DDL-8000AP-MS  | DDL-8000AD-SH              |
|--|--|----------------------------|
| Application  | Medium-weight  | Heavy-weight               |
| Lubrication  | Semi-dry   | Minute-quantity Ubrication |
| Max. sewing speed                                  | 5,000sti/min*  | 4,500sti/min*              |
| Max. stitch length                                 | 5n   | nm                         |
| Lift of the presser foot                           | By hand : 5.5mm, Auto : 1st stage 8.5mm, 2nd stage 13.0mm  |                            |
| Lubricating oil                                    | JUKI Machine Oil 7 (equivalent to ISO VG7)   |                            |
| Needle   | Cour DBx1(#11) #9-19 (Nm65-110) h m c a h DBx1(#21) #20~23 (Nm125~160)   |                            |
| Power consumption                                  | Setting of reactine indentification and a setting of the setting o |                            |
| sti/min is the abbreviation for "stitches per minu | e"   |                            |

### WHEN YOU PLACE ORDERS

Please note when placing orders, that the model name should be written as follows:

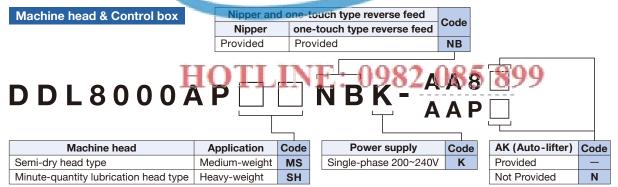

 JUKI ECO PRODUCTS
 The DDL-8000A is an eco-friendly product which complies with JUKI ECO PRODUCTS standards for protecting the environment.

 • The sewing machine complies with the "Juki Group Green Procurement Guidelines" on the use of hazardous substances,





Registered Organization : JUKI CORPORATION Head Office The Scope of the Registration : The activities of research, development, design, sales, distribution, and maintenance services of industrial sewing machines, household sewing machines and industrial robots, etc., including sales and maintenance services of data entry systems.



2-11-1, TSURUMAKI, TAMA-SHI, TOKYO 206-8551, JAPAN PHONE : (81) 42-357-2370 FAX : (81) 42-357-2274 http://www.juki.com

\* Specifications and appearance are subject to change without prior notice for improvement.
\* Read the instruction manual before putting the machine into service to ensure safety.

\* This catalogue prints with environment-friendly soyink on recycle paper.

\* Paper from responsible sources FSC<sup>™</sup> C001712